


FTH-03 + FTH-06



Montagesockel, steckbar

Plug-in cable tie mounts



B _{CH} = ø2,5 ø6,4	Art.-Nr.	Artikel-Bez.	KB max	B _{CH} ø	MS _{CH}	H	FH	W	W2	Farbe
MS _{CH} = 0,8-3,2	00120	FTH-03-N	3,6	4,8	0,8-2,0	7,5	5,4	14,3	7,1	□
	33605	FTH-06/5-N	4,8	6,2	0,8-3,2	4,5	7,5	18,3	6,4	□
	33606	FTH-06/5-SW	4,8	6,2	0,8-3,2	4,5	7,5	18,3	6,4	■
	25755	FTH-06/7-N	7,8	6,2	0,8-3,2	7,1	7,5	21,0	10,0	□
	25762	FTH-06/7-SW	7,8	6,2	0,8-3,2	7,1	7,5	21,0	10,0	■
	00123	FTH-06-N	4,8	6,4	1,2-2,8	6,6	7,1	15,9	7,2	□
	17345	FTH-06-SW	4,8	6,4	1,2-2,8	6,6	7,1	15,9	7,2	■

weitere Abmessungen a. A. · Unit: mm · MOQ 100x

Standard-Material: PA UL-94 V-2 □ natur -40°C bis +75°C
PA UL-94 V-2 ■ schwarz -40°C bis +75°C

FTH-09




Montagesockel, steckbar

Plug-in cable tie mounts

B _{CH} = ø6,4	Art.-Nr.	Artikel-Bez.	KB max	Farbe
MS _{CH} = 3,2	00126	FTH-09-N	4,8	□

Unit: mm · MOQ 100x

Standard-Material:
PA UL-94 V-2 □ natur -40°C bis +75°C

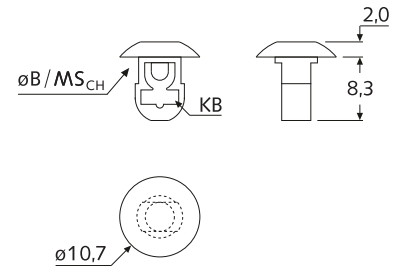

FTH-15




Montagesockel, steckbar

Plug-in cable tie mounts


B _{CH} = ø7,9	Art.-Nr.	Artikel-Bez.	KB max	Farbe
MS _{CH} = 6,4	00132	FTH-15-N	3,6	□
	36778	FTH-15-V0-N *	3,6	□
	36779	FTH-15-V0-S *	3,6	■

*UL-94 V-0 · Unit: mm · MOQ 100x/1K

Standard-Material:
PA UL-94 V-2 □ natur
PA UL-94 V-0 □ natur / ■ schwarz
-40°C bis +75°C

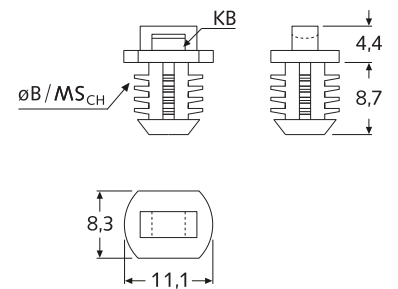

FTH-15-6 + FTH-15-7

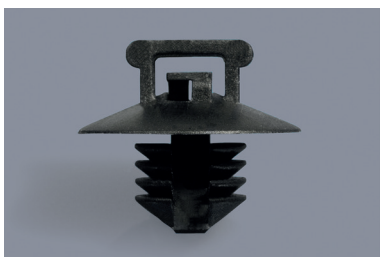


Montagesockel, steckbar

Plug-in cable tie mounts


B _{CH} = ø6,5-7	Art.-Nr.	Artikel-Bez.	KB max	B _{CH} ø	MS _{CH} min.	H	FH	W	W2	Farbe
MS _{CH} = 0,8-3	29147	FTH-15-6-SW	4,8	6,5-7,0	≥0,8	6,5	7,2	9,0	3,5	■
	29149	FTH-15-7-SW	4,8	6,5-7,0	≥0,8	6,3	7,2	13,3	9,0	■

weitere Abmessungen a. A. · Unit: mm · MOQ 100x

Standard-Material:
PA UL-94 V-2 ■ schwarz
-40°C bis +75°C

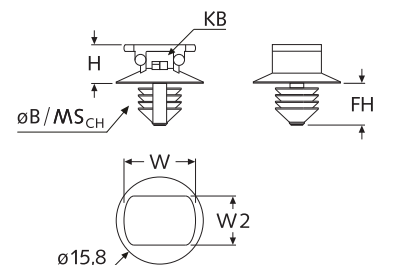


FTH-02-N

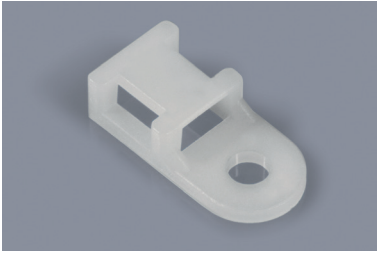

Montagesockel, schraubbar

Screw-on cable tie mounts

Typ A




Art.-Nr.	Artikel-Bez.	ID ø	KB max	S	H	W	W2	Typ	Farbe
17342	FTH-02-N-M3,5	3,6	5,5	1,4	4,8	19,5	9,5	A	□
33859	FTH-02-N-M4-4	4,3	5,0	1,6	5,0	19,0	9,5	A	□
39165	FTH-02-S-M4-5	4,3	5,0	2,9	6,0	19,2	9,8	C	■
18622	FTH-02-N-M4-1	4,4	5,0	1,5	4,9	19,5	9,6	B	□
35050	FTH-02-N-M6	6,5	5,0	1,6	5,0	19,0	9,5	A	□


weitere Abmessungen a. A. · Unit: mm · MOQ 100x

Standard-Material: PA UL-94 V-2 □ natur / ■ schwarz -40°C bis +75°C


Typ B



Typ C




FTH-02-S

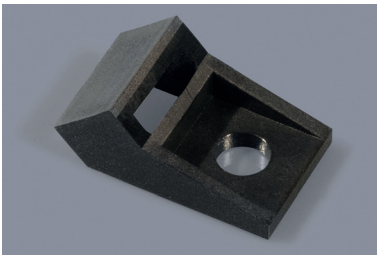

Montagesockel, schraubbar

Screw-on cable tie mounts




Art.-Nr.	Artikel-Bez.	ID ø	KB max	SB	S	H	W	W2	Farbe
18623	FTH-02-S-M4-45°	4,2	8,3	2,5	1,8	8,0	19,0	11,3	□
18624	FTH-02-S-M5-X-45°	5,2	12,3	1,6	1,7	5,7	23,5	16,3	□
22460	FTH-02-S-M8-45°	8,4	16,7	2,3	2,5	10,3	27,4	21,4	■

weitere Abmessungen a. A. · Unit: mm · MOQ 100x

Standard-Material: PA UL-94 V-2 ■ schwarz -40°C bis +75°C UV

FTH-22

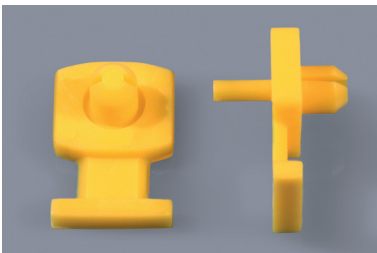


Montagesockel, mit Spreizniete

Cable tie mounts with rivet

Art.-Nr.	Artikel-Bez.	KB max	Farbe
09416	FTH-22-G gelb	4,8	□

Unit: mm · MOQ 1.000x

Standard-Material:
PA UL-94 V-2 □ gelb
-40°C bis +75°C

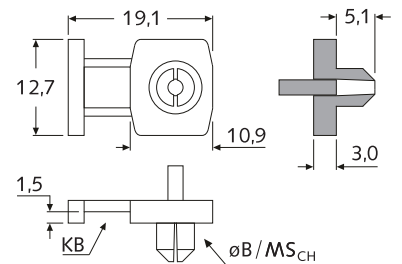

- UV = UV-beständig UV-resistant
- HT = Hitzebeständig Heat-resistant
- V-O = Schwer entflammbar Flame-resistant