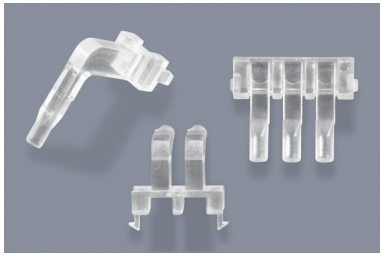


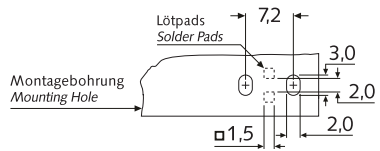
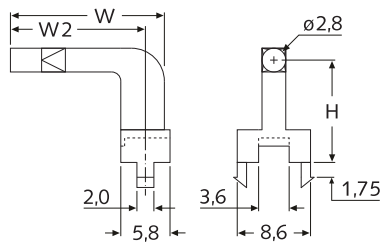
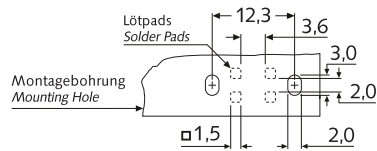
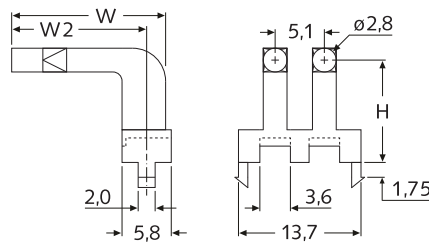
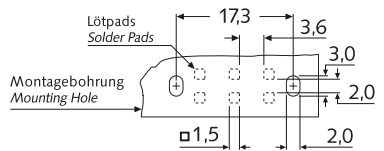
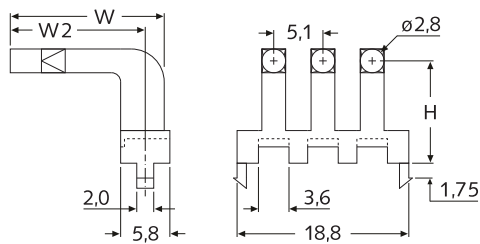
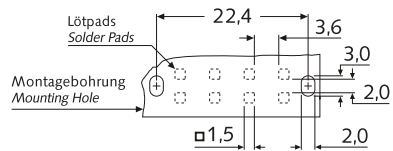
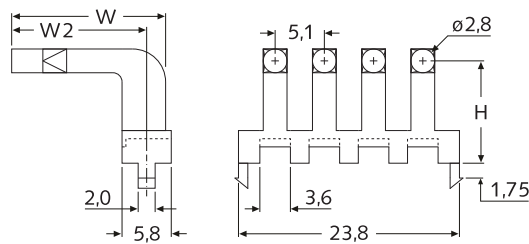
LU LP5 + LU LP6 + LU LP7 + LU LP8

**Starrer Frontplatten-Lichtleiter,
rechtwinklig, Leiterplattenmontage**
*Rigid front panel light pipes, right angle
board mount*

	LU LP5	LU LP6	LU LP7	LU LP8	H	W	W2	Farbe
	1er	2er	3er	4er				
NEW	-	-	51162	-	5,0	14,0	12,0	<input type="checkbox"/>
	24878	24888	24897	24906	5,0	16,0	14,0	<input type="checkbox"/>
	24879	24889	24898	24907	5,0	19,0	17,0	<input type="checkbox"/>
	24880	24890	24899	24908	5,0	22,0	20,0	<input type="checkbox"/>
	24881	24891	24900	24909	10,0	16,0	14,0	<input type="checkbox"/>
	24882	24892	24901	24910	10,0	19,0	17,0	<input type="checkbox"/>
	24883	24893	24902	24911	10,0	22,0	20,0	<input type="checkbox"/>
	24884	-	-	-	10,0	26,0	24,0	<input type="checkbox"/>
	24885	24894	24903	24912	15,0	16,0	14,0	<input type="checkbox"/>
	24886	24895	24904	24913	15,0	19,0	17,0	<input type="checkbox"/>
	24887	24896	24905	24914	15,0	22,0	20,0	<input type="checkbox"/>

weitere Abmessungen a. A. · Unit: mm · MOQ 100x
Standard-Material:

 Polycarbonat transparent / klar
 UL-94 V-2 -150°C bis +135°C

Montagehinweis: Schnelle Montage durch Stecken in Standard Leiterplatten

LU LP5

LU LP6

LU LP7

LU LP8

**Montagebeispiel
Mounting Example**
