



■ VSLO



Oval-Rohr-Lamellenstopfen, ellipsenförmig, mit planem Kopf

Oval finned push-in plugs with plane head

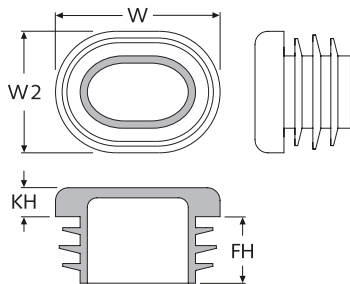

Art.-Nr.	WxW2	WS	FH	KH	Farbe
schwarz	○	Wandstärke			
21017	20x10	1,0-2,0	10,0	5,5	■
04098	30x15	1,0-2,5	11,5	5,0	■
16722	35x15	0,8-2,5	11,5	5,5	■
24384	35x20	1,0-3,0	11,5	5,0	■
24385	38x20	1,0-3,0	11,5	5,0	■
24386	40x20	0,8-3,0	11,5	5,0	■
24387	40x25	1,0-3,0	11,5	5,0	■
24388	45x18	1,5-3,0	11,5	5,0	■
24389	45x20	1,5-3,0	11,5	5,0	■
24390	48x20	1,0-2,5	11,5	5,0	■
24391	50x15	1,0-2,5	11,5	5,0	■
24392	50x20	1,0-3,0	11,5	5,0	■
24393	50x25	1,0-3,0	11,5	3,0	■
24394	50x25	1,0-3,0	15,0	5,0	■
24395	50x30	1,0-3,0	11,5	5,0	■
24396	60x20	1,0-2,0	14,0	5,0	■
24397	60x25	1,5-3,0	14,5	5,0	■
24398	60x30	1,0-2,0	13,0	5,0	■

Unit: mm · MOQ 100x

Standard-Material:

PE ■ schwarz -40°C bis +80°C

Material auf Anfrage:

PE □ signal-weiß (RAL 9003)

PE ■ verkehrs-grau (RAL 7042)

Hinweis:

Die Oberfläche ist nach Wahl des Herstellers entweder glatt oder erodiert.



Artikel-Bez. für Oval-Rohrstopfen, mit planem Kopf (VSLO):

04098 - WxW2=30x15 - WS=1,0-2,5 mm

04098-VSLO 30x15x1025 P sw

